

2600 Series

Explosion Proof Handlamp

Jobsite Lighting



ERICSON
SAFETY IS OUR STANDARD



Industry Leading Features:

- ⚡ cETLus listed
- ⚡ Class I & II Div 1 & 2, Groups C, D, F & G
- ⚡ NEMA 4X Rated, and Wet location rated
- ⚡ Copper-free, cast aluminum, anti-spark guard.
- ⚡ High-impact tempered borosilicate glass globe
- ⚡ Heat, chemical and impact resistant, glass reinforced handle
- ⚡ Cord restraint seal system provides flex and water resistance.
- ⚡ Accommodates #16/3 to #14/3 in various types of cord jackets.
- ⚡ Hand lamps are available in 25, 50 and 100 ft. cord lengths
- ⚡ -20°C to 40°C Ambient
- ⚡ Industry exclusive 25-watt, enclosed rated, 2550 lumen A-21, 4000K LED lamp

 **Industry Leading, Ericson Exclusive**

Applications:

- Waste / Water treatment
- Grain elevators
- Mining
- Oil refineries
- Coal Barns/Fuel storage
- Hazardous locations
- Aerospace
- Shipyards



1926-12A-LED-L
Inline Low Voltage Transformer Version



Unique Features:



Heavy duty,
copper-free, cast
aluminum guard



Rubber bumper
protects case



Enclosed rated
25-watt LED Lamp



Non-conductive,
high-impact glass
reinforced handle

1.800.ERICSON

info@ericson.com

2600 Handlamp Series Selection Guide*:

Part Number	LED Wattage	Lumens	Cord Length / Cord Type	Bulb Type	Primary Connection	Low Voltage	LV Transformer
120VAC							
2600-LED	25 watts	2550	None, Hand Lamp Only	A21	None, Hand Lamp Only**	-	-
2625-LED	25 watts	2550	25 ft. / #14/3 SOOW	A21	1510-PW6P NEMA 5-15	-	-
2625-LED-XP	25 watts	2550	25 ft. / #14/3 SOOW	A21	Explosion Proof N5-15 Plug	-	-
2650-LED	25 watts	2550	50 ft. / #14/3 SOOW	A21	1510-PW6P NEMA 5-15	-	-
2650-LED-XP	25 watts	2550	50 ft. / #14/3 SOOW	A21	Explosion Proof N5-15 Plug	-	-
26100-LED	25 watts	2550	100 ft. / #14/3 SOOW	A21	1510-PW6P NEMA 5-15	-	-
26100-LED-XP	25 watts	2550	100 ft. / #14/3 SOOW	A21	Explosion Proof N5-15 Plug	-	-
12VAC, Low Voltage							
2600-LED-L	7.3 watts	850	None, Hand Lamp Only	A19	None, Hand Lamp Only***	Yes	1941-12-CF
2625-LED-L-CF	7.3 watts	850	25 ft. / #14/3 SOOW	A19	 1507-PW6P NON-NEMA	Yes	1941-12-CF
2650-LED-L-CF	7.3 watts	850	50 ft. / #14/3 SOOW	A19	 1507-PW6P NON-NEMA	Yes	1941-12-CF
26100-LED-L-CF	7.3 watts	850	100 ft. / #14/3 SOOW	A19	 1507-PW6P NON-NEMA	Yes	1941-12-CF
1926-12A-LED-L*	7.3 watts	850	25 ft. / #14/3 SOOW	A19	 NEMA 5-15	Yes	Inline 30VA
1926-12B-LED-L*	7.3 watts	850	50 ft. / #14/3 SOOW	A19	 NEMA 5-15	Yes	Inline 30VA

*1926 series is not listed.

** Assembled with 120-Volt, 25-Watt LED lamp only, no cord.

*** Assembled with 12-Volt, 7.3-Watt LED lamp only, no cord.

Low Voltage Transformers:

- Designed to meet NEC and OSHA Code Requirements for LV Lighting when used in Damp or Confined Space Applications.
- Transformers, in corrosion resistant, impact resistant non-metallic enclosures, convert 120vac to 12vac for areas where 12v is required.
- Available in Non-NEMA CF style receptacles for fixtures with dedicated 12vac lamps.
- Portable transformers are available with 4 receptacles providing 12vac power. Each Receptacle is individually overload protected.
- Portable Transformer is provided with industrial grade N5-15 plug.





Part Number	Transformer	Primary Cord Length	Primary Plug	Receptacle Configuration	Receptacle Overload Protection
1941-12CF	120V to 12V 400VA	6', 14/3 SOW Yellow	NEMA 5-15	 15A, NON-NEMA	4 ea, Push to Reset

2600 Series Replacement Parts:

Part Number	Replacement Part	Image Reference
2603	Handle	A
2604	Cord strain relief kit	B
2605	Replacement base & Socket assembly	C
2610	Guard & Globe Assembly	D
SLBLED-12	7.3-watt 12VAC, 5500K LED Lamp	E
SLBLED-60	11-watt 120VAC, 2700K LED Lamp	E
LED25W-120V-4000K	25-watt 120VAC, 4000K LED Lamp	E



Product Specifications:

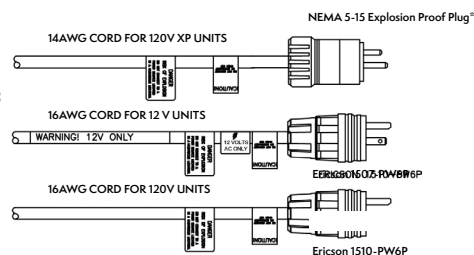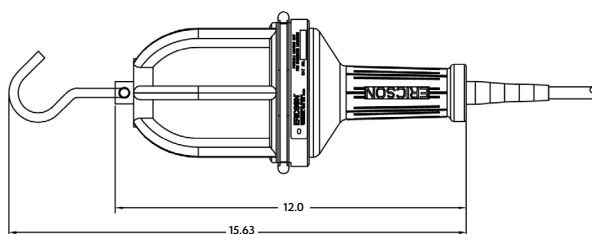

*Approved HAZ Location Manufacturers Plugs Available.


Related Products:




SL HAZ
Class I, Div II Stringlight



1009
Class I, Div II,
Highbay/Flood

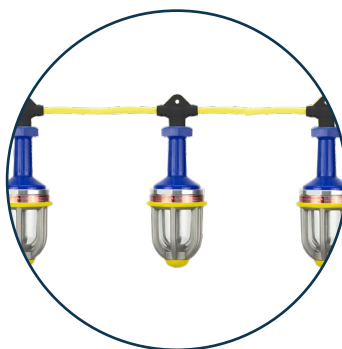

123100 Series
Class I, Div I
Hazardous Location Stringlight



1007
Class I, Div I, Highbay



Ericson Manufacturing Company
4323 Hamann Parkway
Willoughby, OH 44094, USA



1-800-374-2766
info@ericson.com

L1000508F
Rev: 04/29/25

ericson.com