

# SL Series Linear LED Industrial Stringlight

## Jobsite Lighting




**ERICSON**  
SAFETY IS OUR STANDARD



### Industry Leading Features:

- cETLus listed
- Universal Voltage Driver Rating - 100-277-Volt
- Nema 4X and, 6P and IP67 Ratings
- Low profile linear design
- Impact-resistant, high-temperature lens
- 200° and 360° beam spread available
- Ambient Operating Temperature -20 - 40C
- FCC CFR 47 Part 15, subpart B Compliant
- Canadian ICES-003 Compliant
- LSZH Compliant Cable options
- Water-tight Plugs & Connectors are Standard
- Standalone or daisy-chain operation
- Available in 50' or 100' overall lengths
- Packaged with replaceable clear outer tube wrap
- Other plug/connectors configurations available

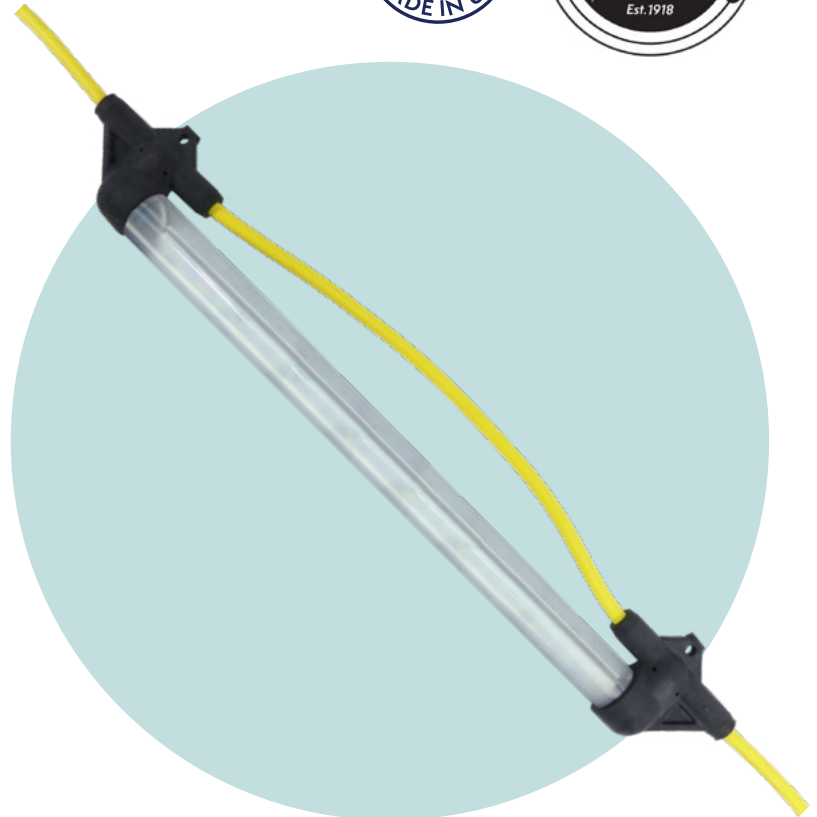

### Applications:

- Petrochemical
- Ship Building
- Power Generation
- Mining
- Aircraft
- Food and Beverage
- Mass Transit & Tunneling
- Aerospace


**EC&M**  
**Product of the Year**  
2021 Category Winner



### Unique Features:



NEMA 3R, (IP24), 4X  
(IP56), 6P (IP67)  
Rating



Shatter  
Resistant  
Tube



14/3 SEOW Standard.  
Custom cable options  
available.



Standard with  
watertight plug and  
connector


## SL Series Specifications\*:

Product Number	Lamp Length	Lamp Quantity	Beam Angle	Overall Length (Feet)	Lamp Spacing (Feet)	Primary Length (Feet)	Total Lumens @ 4000k	Max. No. of Strings @120V	Max. No. of Strings @277V	Total Wattage
<b>1 foot lamps - Up to 1800 lumens per lamp</b>										
SL11-14350Y-1-3-D	1 ft. 0.3 m	3	200°	50 ft. 15.24 m	16.7 ft. 5.09 m	14.9 ft. 4.54 m	4,224	24	55	37
SL11-14350Y-1-4-D	1 ft. 0.3 m	4	200°	50 ft. 15.24 m	12.5 ft. 3.81 m	10.7 ft. 3.26 m	5,632	20	46	49
SL11-14350Y-1-3-360	1 ft. 0.3 m	3	360°	50 ft. 15.24 m	16.7 ft. 5.09 m	14.9 ft. 4.54 m	4,527	24	55	37
SL11-14350Y-1-4-360	1 ft. 0.3 m	4	360°	50 ft. 15.24 m	12.5 ft. 3.81 m	10.7 ft. 3.26 m	6,036	20	46	49
SL11-143100Y-1-7-D	1 ft. 0.3 m	7	200°	100 ft. 30.48 m	14.29 ft. 4.36 m	12.5 ft. 3.81 m	9,856	11	25	87
SL11-143100Y-1-8-D	1 ft. 0.3 m	8	200°	100 ft. 30.48 m	12.5 ft. 3.81 m	10.7 ft. 3.26 m	11,264	8	23	99
SL11-143100Y-1-7-360	1 ft. 0.3 m	7	360°	100 ft. 15.24 m	14.29 ft. 4.36 m	12.5 ft. 3.81 m	10,563	11	25	87
SL11-143100Y-1-8-360	1 ft. 0.3 m	8	360°	100 ft. 15.24 m	12.5 ft. 3.81 m	10.7 ft. 3.26 m	12,072	8	23	99
<b>2 foot lamps - Up to 4000 lumens per lamp</b>										
SL22-14350Y-1-3-D	2 ft. 0.6 m	3	200°	50 ft. 15.24 m	16.7 ft. 5.09 m	14.4 ft. 4.39 m	9,078	14	32	81
SL22-14350Y-1-3-360	2 ft. 0.6 m	3	360°	50 ft. 15.24 m	16.7 ft. 5.09 m	14.4 ft. 4.39 m	9,831	14	32	81
SL22-143100Y-1-7-D	2 ft. 0.6 m	7	200°	100 ft. 30.48 m	14.29 ft. 4.36 m	12 ft. 3.64 m	21,182	6	13	189
SL22-143100Y-1-7-360	2 ft. 0.6 m	7	360°	100 ft. 15.24 m	14.29 ft. 4.36 m	12 ft. 3.64 m	22,939	6	13	189

\* - Custom voltage, light output, CCT color, string length, fixture spacing, cord color, conductors and jacket specification is available. Contact factor for specific application.

## Design Your Own Stringlight:


Use the fillable spaces below to customize your own 2600 Series Stringlight. Once complete, please forward to your Ericson Channel & Applications Team at sales@ericson.com.

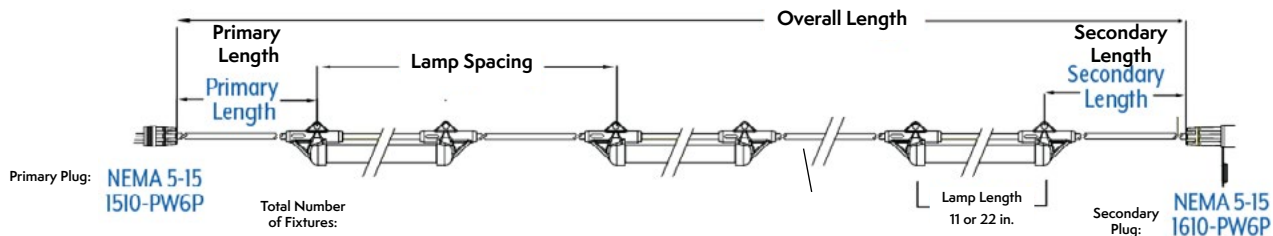

## Notes and Specifics:


# Stringlight Accessories & Replacement Parts:

Part Number	Description	Image Reference
TS-14	Clear Lens shield 1' (4pcs per package)	A
TS-24	Clear Lens shield 2' (4pcs per package)	A
TS-14-F	Frosted lens shield 1' (4pcs per package)	A
TS-24-F	Frosted lens shield 2' (4pcs per package)	A
1510-PW6P	NEMA 5-15 watertight plug	B
1610-CW6P	NEMA 5-15 watertight connector	C
SLHK-02	Stainless steel support hooks (10pcs)	D
MOUNT-MAG-CLAMP	Magnet Mount, 2-Pack with Tube Clamp	E
MOUNT-MAG-HOOK	Magnet Mount, 2-Pack with Hookeye	F
MOUNT-MAG-STRAP	Magnet Mount, 2-Pack with 8" Velcro Strap	G
MOUNT-STRAP-18	Velcro Strap 2-Pack 18x3/4" Black 2-Pack	H

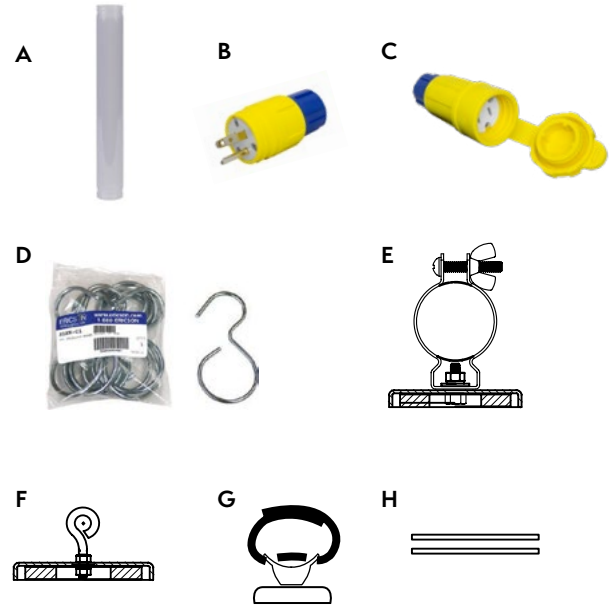


## Related Products:

Click on an image or scan the QR Code for more product information.



[Industrial Location & MIL-SPEC String Lights](#)

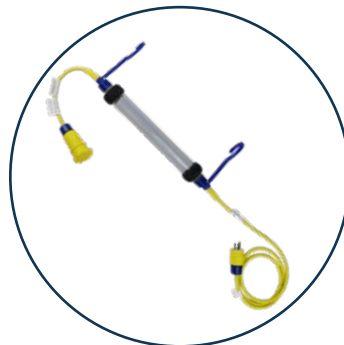

[WL Series Industrial Worklight](#)



[SL HAZ Class I, Div II Stringlight](#)



[123100 Series Class I, Div I Hazardous Location Stringlight](#)



Ericson Manufacturing Company  
4323 Hamann Parkway  
Willoughby, OH 44094, USA



1-800-ERICSON  
info@ericson.com  
L1000772K

ericson.com